

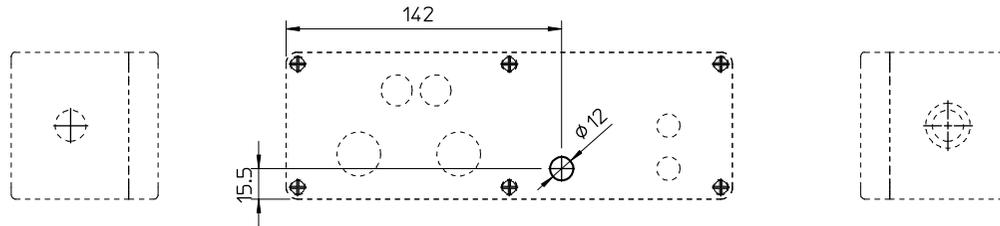


SW5 = 2 POSITION SWITCH OPERATION KNUCKLE ARM CYLINDER


SW5-Interrupteur vérin d'articulation

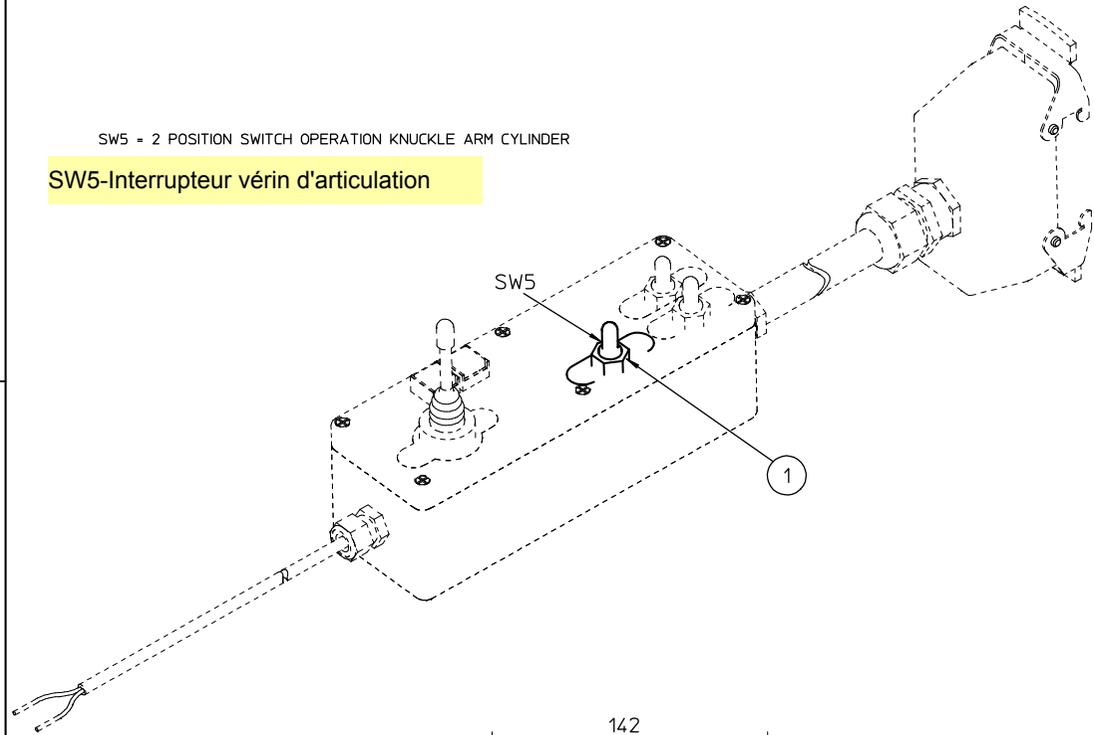


WIRING DIAGRAM

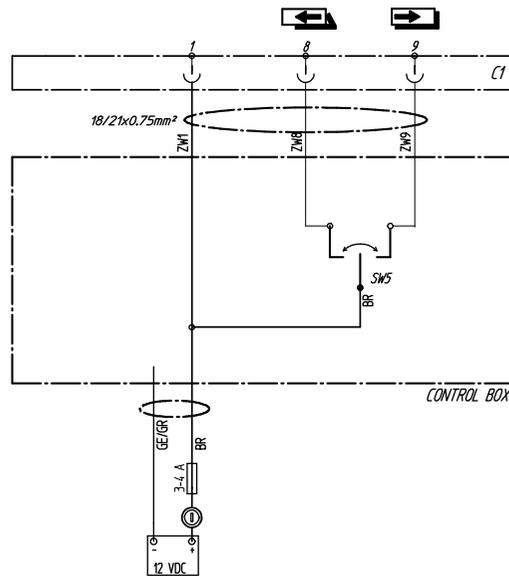


- BR-Marron
- BL-Bleu
- ZW-Noir
- WI-Blanc
- PR-Violet
- GR-Vert
- GER-Jaune
- RD6Rouge
- OR-Orange

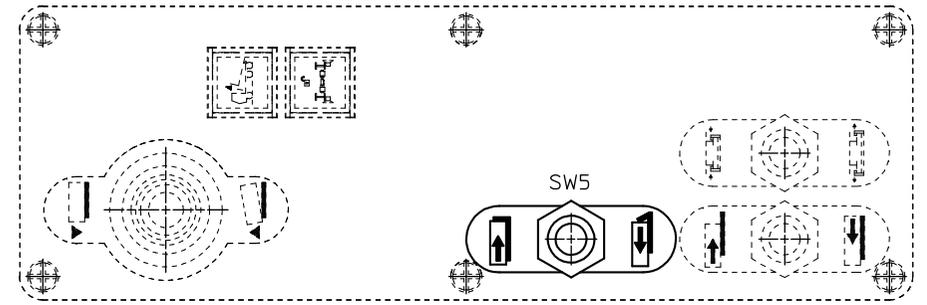

top1
Scale 1:1

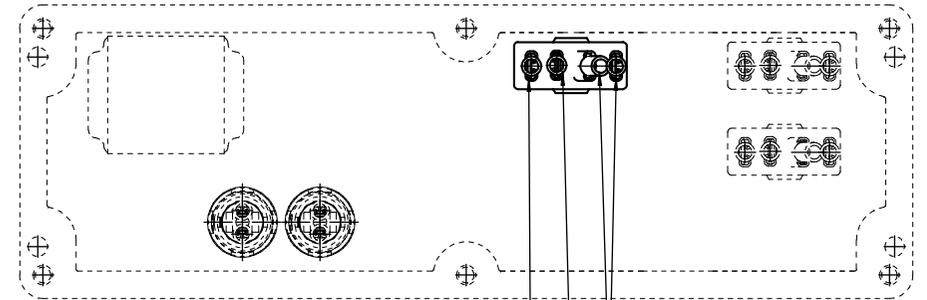

bottom1
Scale 1:1



USE I.C.W. H0003642/H0003669

3	1	35090050	CABLE TAG 6.3 MM REDINCL BRANCH	-
2	3	35090005	CABLE TAG 6.3 MM RED	-
1	1	35010111	SWITCH 2 P. SPRING RETURN (METAAL)	-
Pos	Qty	Part No.	Part Name	Material

BOM: H0003670

ROUGHNESS NEN 3634	DIMENSION TOL. ISO 2768 I Class c	SHAPE & POSITION TOL. ISO 2768 I Class L	NORM	SCALE	1:2	A2
			MATERIAL	UNITS	MM	
	ORG.	2009/05/11	MR	DESCRIPTION		
	DRW.	2009/05/11	MR	CONTR. BOX KNUCKLE ARM		
	APPR.	2009/05/11	MR	ELECTRIC CONTROL 12/24V		
	REL.	2009/05/11	MR			

INDEX DESCRIPTION		DRAWING-NUMBER		VERSION	SHEET
HYVA LIFT / TECHNIMICS B.V. Zandvlietstraat 21 NL-7903 BR Hoogeveen www.hyva.com		H0003670		1	1/1